14836BFSBTTR - ACCESSIBLE SHOWERS

Interior: $48 \times 36 \times 76 \frac{3}{4}$ Exterior: $54 \times 38 \frac{1}{8} \times 78 \frac{3}{4}$

inches

The 14836BFSBTTR accessible shower features innovative installation design, including an engineered leveled base and improved front threshold with molded integral linear trench drain. A true time and money saver, our pre-leveled base lets you install directly on a **level** floor. And its front threshold is engineered to keep a constant level with the innovative nailing flange.



Shown fully-equipped

AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support

COLOR & TRIM OPTIONS

Stock	Upgraded		
White	Biscuit Bone		

^{**}Additional custom colors available. (Contact Customer Service)

FEATURES

- Pre-leveled base
- AcrylX[™] applied acrylic surface
- ½" skirt
- ½" beveled threshold
- Barrier free when properly installed
- Smooth large subway tile wall
- Center front drain outlet
- Integral front trench drain
- Lifetime Limited Warranty Residential Use/30-year Commercial Use

OPTIONS

- Grab bars
- Fold-up seat
- Hand-held shower assembly with slide bar
- Pressure balancing mixing valve
- Large soap dish
- Small soap dish
- Curtain rod and/or shower curtain
- Tamper-proof grate

CODE COMPLIANCE

- FHA
- ICC/ANSI A117.1
- HUD UM73a
- CSA B45.5-11/ IAPMO Z124-2011



Aquatic products may be specified as Lasco Bathware.




^{**}Code compliant when fully equipped and installed according to guidelines.



14836BFSBTTR

Interior: 48 x 36 x 76 3/4

Exterior: $54 \times 38 \% \times 78 \%$

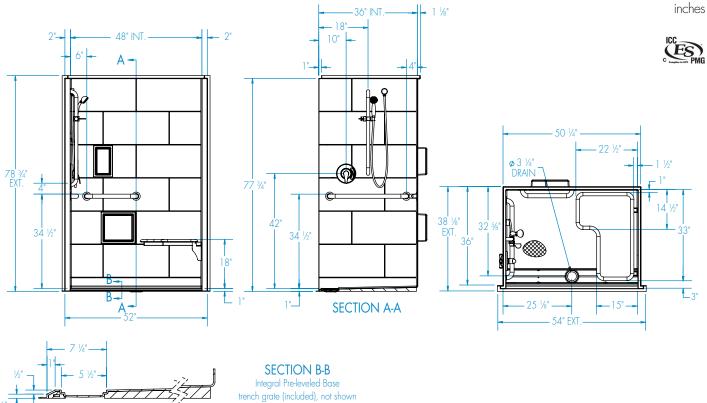

FEATURES Dimensional Tolerance ± %". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.


Type and Model #	Material	Wall Finish	Pieces	Drain	Dam/Skirt Height	Net Wt. Ibs	Pkg. Wt.
Shower 14836BFSBTTR	AcrylX™ applied acrylic	Smooth tile	1	Center Front	½" skirt ½" beveled threshold	160	170

DIMENSIONS

Specifications	inches
Width: Ext. / Int.	54 / 48
Depth: Ext. / Int.	38 1/8 / 36
Height: Ext. / Int.	78 3/4 / 76 3/4
Enclosure Opening:	48
Skirt Height:	1/2
Drain Rough-In (from Back Wall)	32 %
Drain Rough-In (from Side Wall)	25 1/8

FRAMING DIMENSIONS inches

Туре	D Depth	W Width	H Height	А	В	С
Alcove	36	50 1/4	_	Box Out	25 ½	32 5 ⁄8



Aquatic products may be specified as Lasco Bathware.