# 16036BFSBTTR - ACCESSIBLE SHOWERS

#### With Seat

Interior:  $60 \times 36 \times 76 \frac{3}{4}$ Exterior:  $66 \times 38 \frac{1}{8} \times 78 \frac{3}{4}$ 

inches

The 16036BFSBTTR roll-in shower features innovative installation design, including an engineered leveled base and improved front threshold with molded integral linear trench drain. A true time and money saver, our pre-leveled base lets you install directly on a **level** floor. And its front threshold is engineered to keep a constant level with the innovative nailing flange.



Shown fully-equipped

## AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support

#### **COLOR & TRIM OPTIONS**

Stock	Upgraded		
White	Biscuit Bone		

<sup>\*\*</sup>Additional custom colors available. (Contact Customer Service)

## **FEATURES**

- Pre-leveled base
- AcrylX<sup>™</sup> aplied acrylic surface
- ½" skirt
- 1/2" beveled threshold
- Barrier free when properly installed
- Smooth large subway tile wall
- Center front drain outlet
- Integral front trench drain
- Lifetime limited warranty

## **OPTIONS**

- Grab bars
- Fold-up seat
- Hand-held shower assembly with slide bar
- Pressure balancing mixing valve
- Large soap dish
- Small soap dish
- Curtain rod and/or shower curtain, shipped loose
- Tamper-proof grate

## **CODE COMPLIANCE**

- ADA
- FHA
- ICC/ANSI A117.1
- HUD UM73a
- CSA B45.5-11/ IAPMO Z124-2011
  - \*\*Code compliant when fully equipped and installed according to guidelines.



Aquatic products may be specified as Lasco Bathware.






## 16036BFSBTTR

## With Seat

Interior: 60 x 36 x 76 3/4

Exterior: 66 x 38 1/8 x 78 3/4

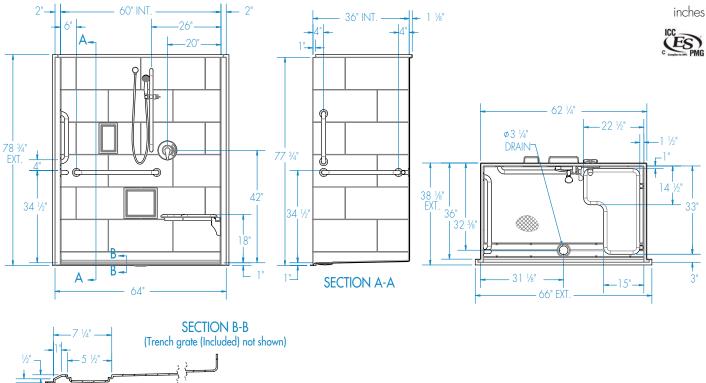

FEATURES Dimensional Tolerance ± %". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type and Model #	Material	Wall Finish	Pieces	Drain	Dam/Skirt Height	Net Wt. Ibs	Pkg. Wt. Ibs	
Shower 16036BFSBTTR	$AcrylX^{TM}$	Smooth tile	1	Center Front	½" skirt ½" beveled threshold	200	210	

### **DIMENSIONS**

Specifications	inches		
Width: Ext. / Int.	66 / 60		
Depth: Ext. / Int.	38 1/8 / 36		
Height: Ext. / Int.	78 ¾ / 76 ¾		
Enclosure Opening:	60		
Skirt Height:	1/2		
Drain Rough-In (from Back Wall)	32 %		
Drain Rough-In (from Side Wall)	31 1/8		

## FRAMING DIMENSIONS inches

Туре	<b>D</b> Depth	<b>W</b> Width	<b>H</b> Height	H Height A		С
Alcove	36	62 1/4	_	Box Out	31 1/8	32 <b>5/8</b>

