

**FEATURES:**

- **Touchless operation** limits the spread of germs for a safer restroom.
- **CR-P2 lithium battery** Included
- **Battery Life:** 7 years @ 150 uses per day
- **Includes** 4" C-C deck plate and pop-up drain
- **Above-Deck Mixing:** Allows user to manually adjust temperature. Adjustable hot limit stop. Red & blue indicators.
- **Dual Inlets:** For hot and cold water. Check valves included to prevent cross flow. Filter assemblies protect the solenoid valve from debris.
- **Clean, Integrated Design:** All electronics contained in faucet spout. No control box below deck.
- **Easy Installation & Maintenance:** Faucet installs from the top. All serviceable parts are easily accessible.
- **Flexible Selectronic® Platform** with programmable sensor.
- **Adjustable Range:** Detection zone can be adjusted manually or with optional remote control.
- **Fail-Safe:** Faucet automatically shuts off upon loss of power or dead battery. No reset required.
- **Optional Remote Control Allows for Customization**
  - Metering Function
  - Safety Timer
  - Cleaning Mode
  - Thermal Disinfection
  - Comfort Timer
- **Lead-Free:** Faucet contains  $\leq 0.25\%$  total lead content by weighted average.

**MODEL NUMBER:**

■ **DC POWERED**

- 7020255.002** 0.5 gpm pressure compensating, vandal-resistant multi-laminar spray.
- 7020255.295** 0.5 gpm pressure compensating, vandal-resistant multi-laminar spray.

■ **OPTIONAL Remote Control**

- 605XRCW** Remote control adjusts setup parameters and allows for customization of functions.

**DESCRIPTION:**

Deck-mount electronic faucet with proximity operation. Integrated design with sensor, solenoid valve and electronics enclosed in the spout. Above-deck mixing with hot limit safety stop and red / blue indicators. Water pressure range from 20 - 120 psi. Vandal-resistant single-post mounting. Dual inlets for hot and cold water. Pre-installed 24" flexible inlet hoses with filter assembly and 3/8" compression fitting.

**RECOMMENDED SPECIFICATION:**


Electronic, sensor-operated lavatory faucet shall feature a programmable sensor and an electronically operated solenoid valve. Integrated design with all electronics enclosed in the spout. Features above deck mixing with hot limit safety stop and red / blue indicators. Shall also feature a vandal resistant metal body with single-post mounting. Shall meet ANSI A112.18.1 and ANSI 117.1 codes. Model shall be American Standard # 7020255.002, 7020255.295.

**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B 125**
- NSF 372**
- NSF 61**

**ADA** MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND **ANSI A117.1** REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

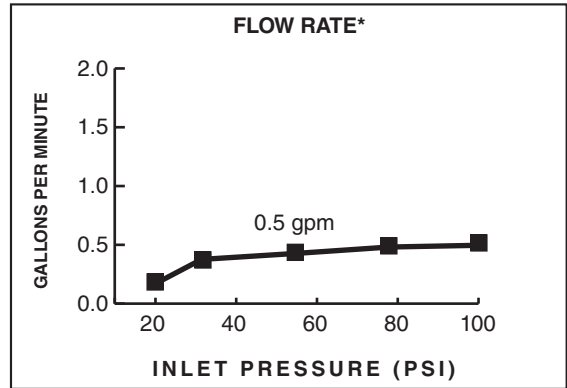

FINISHES:	
Polished Chrome	.002
Brushed Nickel	.295

