

TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET
RIGID/SWIVEL GOOSENECK SPOUT AND THIRD WATER INLET


MODEL NUMBER:*

❑ **6540.173 Widespread Lavatory**

1.5 gpm Pressure Compensating Aerator. Field-convertible rigid/swivel gooseneck spout. Third water inlet for use with pedal valves. Vandal-Resistant Wrist Blade Handles. LESS drain and pop-up hole.



6540.173 Shown

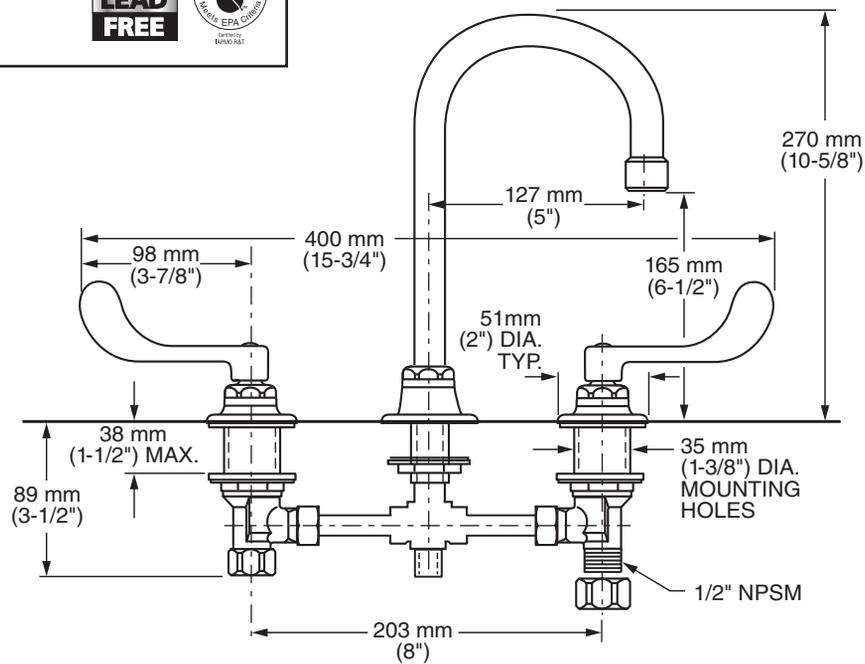

GENERAL DESCRIPTION:

Durable cast brass construction. Cast brass valve bodies with 8" rigid copper connection with compression fittings. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Field-convertible rigid/swivel gooseneck spout. Vandal-Resistant Wrist Blade handles with blue & red color indexes. 1.5 gpm/5.7 L/min. maximum flow rate.

PRODUCT FEATURES:

- 3rd Water Inlet:** 1/2" NPT water inlet connection for use with pedal valves.
- Pressure Compensating Multi-Laminar Spray:** Provides a constant water flow of 1.5 gpm throughout the pressure range.
- Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.
- Ceramic Disc Valve Cartridge:** Assures a lifetime of drip-free performance.
- Field-Convertible Rigid/Swivel Spout:** Easily converted in the field.
- Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.


SUGGESTED SPECIFICATION

Two-handle widespread lavatory faucet shall feature cast brass valve bodies with 8" rigid copper connection and third water inlet. Shall feature water-conserving 1.5 gpm/5.7 L/min. pressure compensating aerator. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Field-convertible rigid/swivel spout. Fitting shall be American Standard Model # 6540.173.002.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASME A112.18.1**
- CSA B125.1**
- NSF 372**

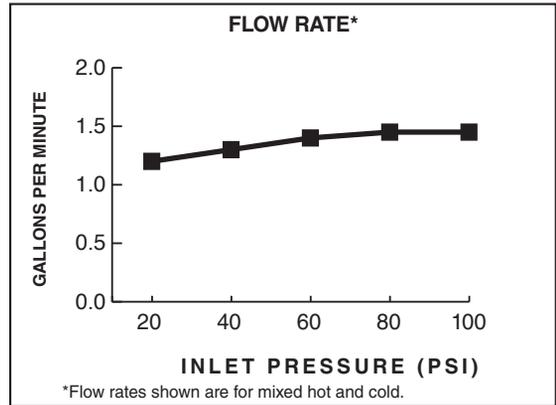

Product Number	Description	Finish
		Polished Chrome
		002
6540.173	Widespread Lavatory with convertible rigid/swivel gooseneck spout. 1.5 gpm/5.7 L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Third water inlets. LESS drain and pop-up hole.	

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for accessible and usable building facilities - check local codes

Other Aerators Available:

Part Suffix	Description
LV15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V15	1.5 gpm (5.7 Lpm) PCA Vandal-Resistant Aerator
LV10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator
V05*	0.5 gpm (1.9 Lpm) PCA Vandal-Resistant Multi-Laminar Spray
V035*	t0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Non-Aerated Spray

PCA - Pressure Compensating
 *Meets Cal Green Code