

FEATURES:

- **Touchless operation limits the spread of germs for a safer restroom**
- **Flexible Selectronic® Platform** with programmable sensor.
- **CR-P2 lithium battery** included
- **Battery Life:** 7 years at 150 uses per day
- **Above-Deck Mixing:** Allows user to manually adjust temperature. Adjustable hot limit stop. Red & blue indicators.
- **Dual Inlets:** For hot and cold water. Check valves included to prevent cross flow. Filter assemblies protect the solenoid valve from debris.
- **Clean, Integrated Design:** All electronics contained in faucet spout. No control box below deck.
- **Easy Installation & Maintenance:** Faucet installs from the top. All serviceable parts are easily accessible.
- **Self-Cleaning Solenoid Reduces Maintenance:** Integral wiper spring prevents clogging and run-on.
- **Adjustable Range:** Detection zone can be adjusted manually or with optional remote control.
- **Fail-Safe:** Faucet automatically shuts off upon loss of power or dead battery. No reset required.
- **Optional Remote Control Allows for Customization**
 - **Metering Function**
 - **Safety Timer**
 - **Cleaning Mode**
 - **Thermal Disinfection**
 - **Comfort Timer**
- **Lead-Free:** Faucet contains ≤ 0.25% total lead content by weighted average.

MODEL NUMBER:

■ **DC POWERED**

- 7020205** 0.5 gpm pressure compensating, vandal-resistant multi-laminar spray.

■ **OPTIONAL 4" and 8" Deck Plates**

- 70204P0** 4" metal deck plate with putty plate.
- 70208P0** 8" metal deck plate with putty plate.

■ **OPTIONAL Remote Control**

- 605XRCW** Remote control adjusts setup parameters and allows for customization of functions. Can be used to program all American Standard faucets and flush valves.

DESCRIPTION:

Deck-mount electronic faucet with touchless operation. Integrated design with sensor, solenoid valve and electronics enclosed in the spout. Above-deck mixing with hot limit safety stop and red / blue indicators. Water pressure range from 20 - 120 psi. Vandal-resistant single-post mounting. Dual inlets for hot and cold water. Pre-installed 24" flexible inlet hoses with filter assembly and 3/8" compression fitting.

RECOMMENDED SPECIFICATION:


Electronic, sensor-operated lavatory faucet shall feature a programmable sensor and an electronically operated self-cleaning solenoid valve with chemical resistant seals. Integrated design with all electronics enclosed in the spout. Features above deck mixing with hot limit safety stop and red / blue indicators. Shall also feature a vandal resistant body with single-post mounting. Shall meet ANSI A112.18.1 and ANSI 117.1 codes. Model shall be American Standard # 7020205.____.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B 125**
- NSF 372**
- NSF 61**

ADA MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND **ANSI A117.1** REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

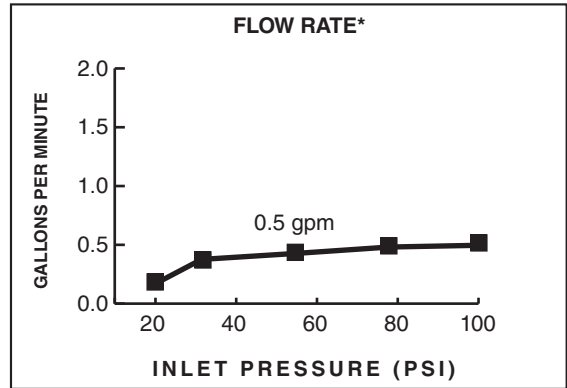

FINISHES:	
Polished Chrome	.002
Brushed Nickel	.295

