



Hot Only Water Dispenser

9625-K55-TG


## **Features**

- Available in 27 finishes including 12 PVD finishes
- All brass construction
- Insulated spout to reduce heat to faucet
- Max flow rate: 1.0 gpm (3.8 L/min)
- Not compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately

## **Codes/Standards Applicable**

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant

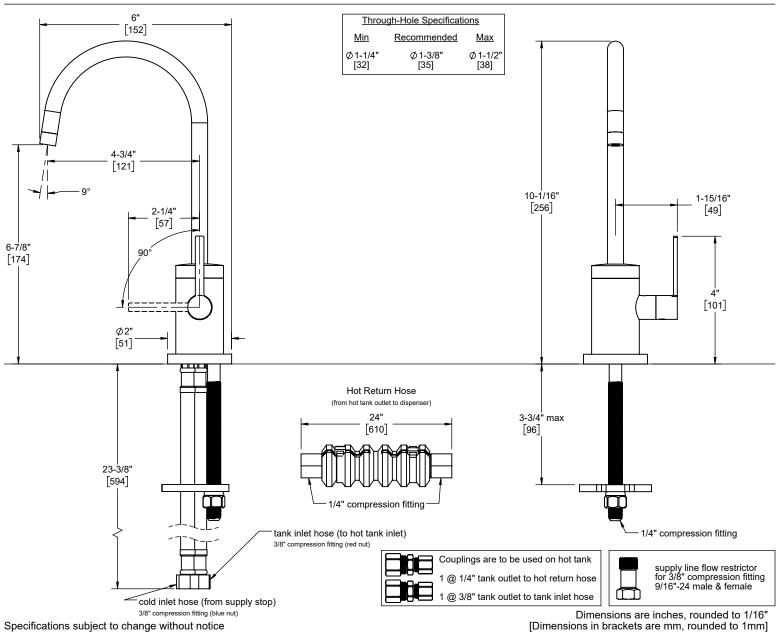

9625-K55-XX\_sp\_210707