

## <u>Steampunk Bay</u>™

DELUXE WALL TUB SPOUT

D-85-85


## **Features**

- Max flow rate: 16 gpm (60.6 L/min) at 60 psi For use with Style Therm, 3-VR or 2-VR valves All brass construction

- Over 30 finishes including 15 PVD finishes



Codes/Standards Applicable Product meets or exceeds the following: • ASME A112.18.1/CSA B125.1

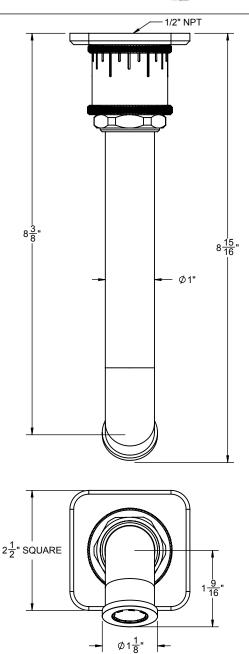

THROUGH HOLE SPECIFICATIONS		
MIN	<u>RECOMMENDED</u>	<u>MAX</u>
SPOUT: Ø1'	′ Ø1-1/4"	Ø1-9/16"

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"

D-85-85\_sp\_181128