



ELEVATION

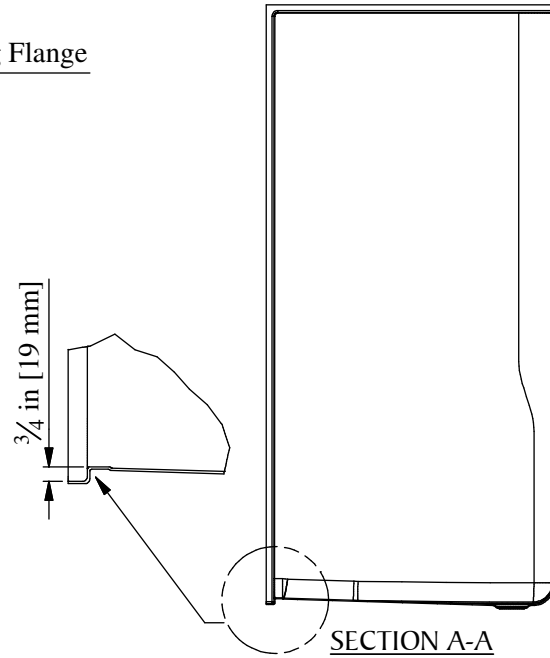

SECTION A-A

PRODUCT SPECIFICATIONS:

- Product material - Acrylix™ surface with fiberglass composite reinforcement.
- Special installation instruction for this unit must be followed carefully.
- Certified to meet CSA B45.5/IAPMO Z124 Standard.
- This unit can be reinforced to meet the accessibility requirements for Type B dwellings upon request.
- Product has a Class B fire rating as determined by ASTM E-84 test method.
- Some accessories may cause this product to exceed the rough-in dimensions illustrated.
- Reinforced & slip resistant floor.
- Integral 1" [25mm] nailing flange.
- Integral 1" [25mm] floor nailing flange.
- Shower Area: W- 36" [914mm] x D- 36" [914mm]
- Door Opening: W- 36" [914mm] x H- 75-3/4" [1924mm]
- Accepts Clarion Bathware Model #IN39 Dome.
- All dimensions =/± 1/2" [12.8mm]
- Clarion Bathware reserves the right to change design and/or dimensions.
- Dimensions are the same for MP and all other versions of this model.

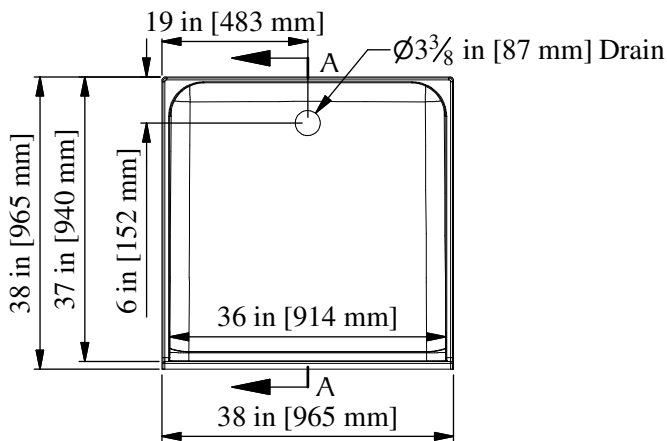

PLAN

38" [965mm] Barrier-Free Shower
w/ 3/4" [19mm] Threshold

REAR CENTER DRAIN

3837BF34

38" [965mm] Barrier-Free Shower w/ 3/4" [19mm] Threshold & Rear Center Drain

Clarion
BATHWARE
44 Amsler Ave.
Shippensburg, PA 16254

Phone: (814) 226-5374
Toll Free: (800) 576-9228
Fax: (814) 226-0730
www.clarionbathware.com

Signatures For Approval:

Customer: _____
Arch./Engr: _____

Date: _____

DWG. #

3837BF34 -CUT

Quote #: _____
Job Name: _____

By: CAL

Date: 5/27/2021