


Framing Pocket 64½" W x 36" D

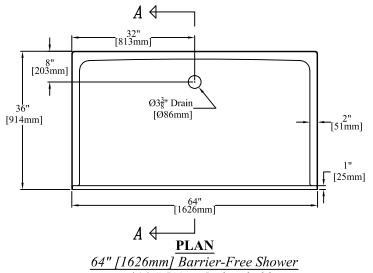

w/ 3/4" [19mm] Threshold

REAR CENTER DRAIN

## PRODUCT SPECIFICATIONS:

- Product material Acrylix<sup>TM</sup> surface with fiberglass composite reinforcement.
- Special installation instructions for this unit must be followed carefully.
- Certified to meet CSA B45.5/IAPMO Z124 Standard.
- This unit can be reinforced to meet the accessibility requirements for Type B dwellings upon request.
- When properly accessorized and installed, product meets requirements of ADA (2010 Std), ICC/ANSI A117.1-2017, ABA or UFAS.
- Product has a Class B fire rating as determined by ASTM E-84 test method.
- Reinforced & slip resistant floor.
- Integral 1" [25mm] nailing flange.
- Integral 1" [25mm] floor nailing flange.
- Shower Floor: W-60" [1524mm] x D-33" [838mm]
- Compartment Opening: W-60" [1524mm] x H-75 3/4" [1924mm]
- A shower door is only recommended if using our 2"x2" Acrylic Threshold.
- All dimensions +/- 1/2" [12.8mm]
- Clarion Bathware reserves the right to change design and/or dimensions.
- Dimensions are the same for RE, MP, and all other versions of this model.

## 6436BF34

64" [1626mm] Barrier-Free Shower w/ 3/4" [19mm] Threshold & Rear Center Drain

BATHWARE
44 Amsler Ave.
Shippenville, PA 16254

Phone: (814) 226-5374 Toll Free: (800) 576-9228 Fax: (814) 226-0730 www.clarionbathware.com

Signatures For Approval:
Customer:
Arch./Engr:
Quote #:
Job Name:

Date: \_\_\_\_\_

Dwg. # 6436BF34-CUT

Dwg. By: CAL DATE: 4/27/2021

\*\*\* IMPORTANT NOTICE \*\*\*