


*** For clarity, *** the whirlpool piping has been omitted from this drawing

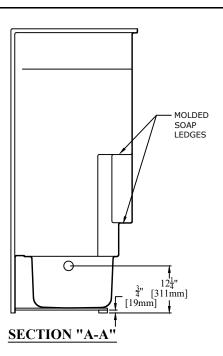

ELEVATION

PRODUCT SPECIFICATIONS:

- * Certified to meet CSA B45.5/IAPMO Z124 Standard.
- * Product has a Class B fire rating as determined by ASTM E-84 test method.
- When installing this whirlpool, an access area should be provided near the location of the whirlpool pump for future access. An access area is required by many local, state & federal building codes.
- Recommended access area dimensions: W-20" [508mm]

H-15" [381mm]

- * Reinforced & slip resistant floor.
- Integral 1" [25mm] nailing flange.
- Spacious bathwell.
- Molded soap ledges.
- Factory drilled 2 1/2" [64mm] overflow.
- Door Opening: W-55 5/8" [1413mm]

H-57 1/2" [1461mm]

Bathwell Dimensions (At Top): W-53 1/4" [1353mm]

D-22 1/4" [565mm]


H-13 1/4" [337mm]

* Bathwell Dimensions (At Bottom): W-46 1/2" [1181mm]

D-20 1/2" [521mm]

Dwg.#

- * Bathwell Capacity (At Overflow): 40 Gal [151L]
- * Water Level (At Overflow): 9 1/2" [241mm]
- * On a 6 jet system the pump will stick out up to 2" from the rough-in dimensions.
- * Accepts Clarion Bathware Model 962 Cap. (Adds 9" [229mm] to the overall height)
- * All dimensions +/- 1/2" [12.8mm]
- A version with an above the floor rough (RE7905LX:4, RE7905LX:6, RE7905RX:4 or RE7905RX:6) is available.
- Clarion Bathware reserves the right to change design and/or dimensions.
- * Dimensions are the same for RE, MP, and all other versions of this product.

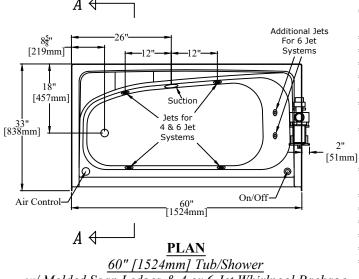

w/ Molded Soap Ledges & 4 or 6 Jet Whirlpool Package

Left Hand Version (RE7905L:4 or RE7905L:6) Shown

RE7905L:4, RE7905L:6, RE7905R:4 or RE7905R:6

60" [1524mm] Tub/Shower w/ Molded Soap Ledges & 4 or 6 Jet Whirlpool Package

44 Amsler Ave.

Shippenville, PA 16254

Phone: (814) 226-5374 Toll Free: (800) 576-9228 Fax: (814) 226-0730 www.clarionbathware.com Signatures For Approval: Date: RE7905L or R Customer: -4&6 JETCUT Arch./Engr: Ouote #: Dwg. By: CAL Job Name: DATE: 5/10/2021

*** IMPORANT NOTICE ***