


Submitted Model No.:

**Specific Features:** 



▲ Designate proper finish suffix

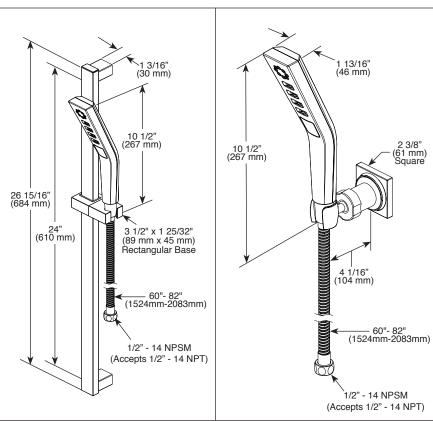

see what Delta can do

# H<sub>2</sub>OKINETIC HÂND SHOWER

■ 3-Spray Setting Hand Shower

## **FEATURES:**

- Touch-Clean® Nozzles
- H<sub>2</sub>Okinetic® PowerDrench Spray
- Lumicoat<sup>™</sup> Finish (-PR models only)
- Lumicoat<sup>™</sup> Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

- **STANDARD SPECIFICATIONS** Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Certified dual check valves for backflow protection
- Change spray modes with pushbutton
- Hand held shower with three spray settings pause is a non-positive shut-off
- 60"- 82"(1524 mm-2083 mm) stretchable metal hose
- 24" (610 mm) wall bar with adjustable slide -51799 only
- Wall mount bracket for hands-free showering - 55799 only
- Lumicoat<sup>™</sup> is not applied to the slide bar or shower hose

### WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



## **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1 ◆
- ASME A112.18.3
- EPA WaterSense®
- Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly