

Ultra Flush™ 1.6GPF (6.0LPF) Wall Hung Pressure Assist Toilet

4 1/4" Vertical Rough-In

Features:

□ 20-370

- Wall-Hung ErgoHeight ADA installable, elongated bowl
- Large 2" fully glazed trapway
- Chrome, metal front tank lever
- Sloan Flushmate Pressure Vessel Included
- Dual fed siphon jets
- 1.6gpf (gallons per flush)
- Two-piece toilet
- Industry MaP Rating 1000g
- Double nut, multi-point tank-to-bowl mounting system for easy installation without breakage
- · Toilet seat not included
- Bolt caps not included

Technical Information:

Included Components:

□ Combination 20-370 □ Bowl HE-21-370 □ Tank 28-370

Fixtures:

Configuration	Two-piece, Elongated Wall-Hung Toilet
Water per Flush	1.6 gpf (6.0 lpf)
Rough-In	4 ¹ /4" (108mm)
Height	30 ⁷ /16" (773mm)
Width	18 ³ /4" (476mm)
Depth	28 ³ /4"(730mm)
Trapway	2" (51mm)
Large Water Surface	10" x 7" (254mmx178mm)
Shipping Weight	75 lbs

Accessories: (to be purchased separately)

Soft Close Toilet Seat	99-213


Colors:

• White only

Warranty:

• 10 year warranty on Pressure Vessel, Limited Lifetime Warranty on Vitreous China



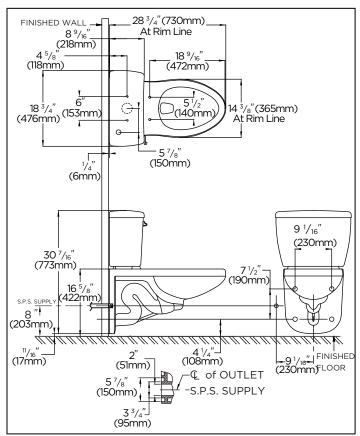









IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A 112.19.2 THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A HIGH EFFICIENCY WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.6 gpf (6 Lpf) OR LESS.

