

Ultra Flush™ 1.28GPF (4.8LPF) Wall Hung Pressure Assist Toilet

4 1/4" Vertical Rough-In

Features:

☐ HE-20-370

- Two-piece toilet
- Wall-Hung ErgoHeight ADA installable, elongated bowl
- Large 2" fully glazed trapway
- · Chrome, metal front tank lever
- Sloan Flushmate Pressure Vessel inside
- Dual fed siphon jets
- 1.28gpf (gallons per flush)
- Industry MaP Rating 1000g
- Double nut, multi-point tank-to-bowl mounting sytem for easy installation without breakage
- Toilet seat not included
- Bolt caps not included

Technical Information:

Included Components:

□ Combination HE-20-370
□ Bowl HE-21-370
□ Tank HE-28-370

Fixtures:

Configuration	Two-piece, Elongated Wall-Hung Toilet
Water per Flush	1.28 gpf (4.8 lpf)
Rough-In	4 ¹ /4" (108mm)
Height	30 ⁷ /16" (773mm)
Width	18 ³ /4" (476mm)
Depth	28 ³ /4"(730mm)
Trapway	2" (51mm)
Large Water Surface	10" x 7" (254mmx178mm)
Shipping Weight	75 lbs

Accessories: (to be purchased separately)

ı	Caft Class Tailet Cast	00 217	
ı	Soft Close Toilet Seat	99-213	


Colors:

• White only

Warranty:

• 10 year warranty on Pressure Vessel, Limited Lifetime Warranty on Vitreous China



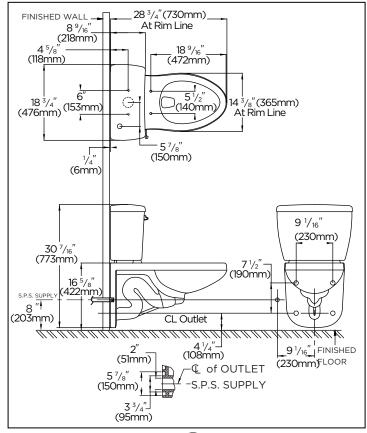









NOTES: All dimensions are in inches and millimeters. Illustrations may not be drawn to scale.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A 112.19.2 THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A HIGH EFFICIENCY WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.28 gpf (4.8 Lpf) OR LESS.



09/18