



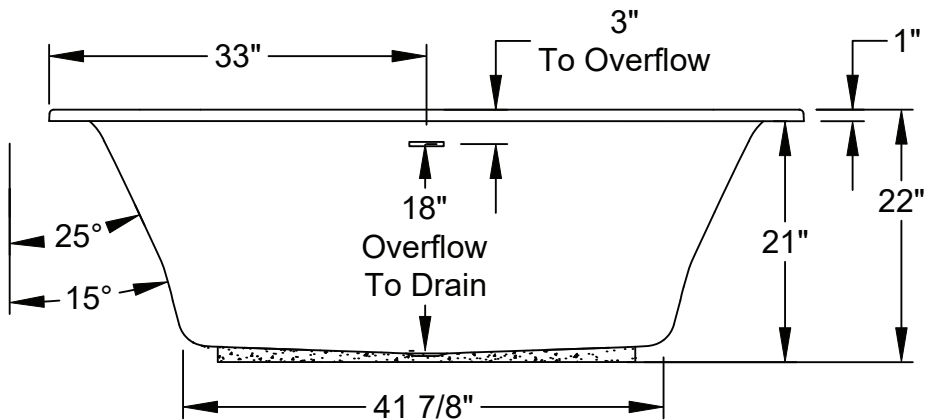

## forma<sup>®</sup> Collection Specifications

### IA553

### MicroSilk<sup>®</sup>

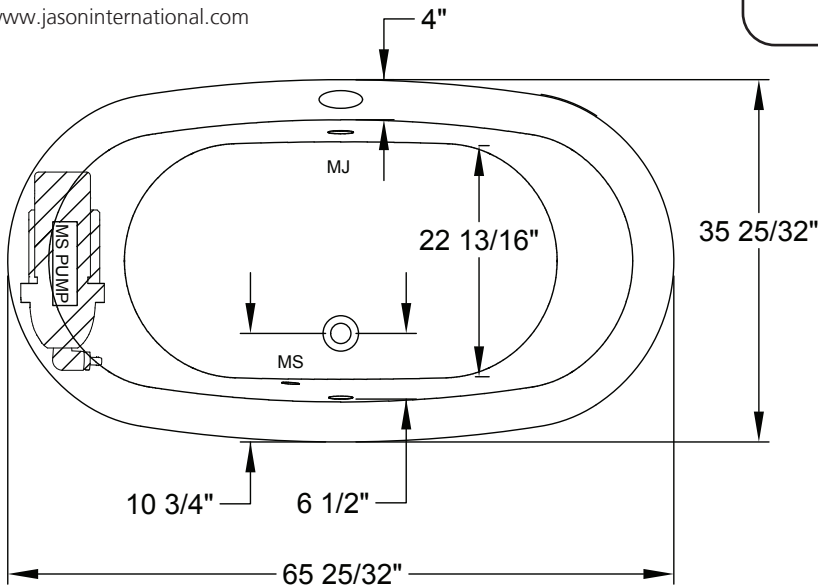

Patents received or pending.

Includes Linear Overflow Drain Assembly

Note: Dimensional Tolerances:  $\pm 1/4"$

**Drop-in Hole Size:** See Diagram

**Operating Capacity:** 39 Gal.

**Overflow Capacity:** 77 Gal.

**Floor Loading / sq.ft.:** 49.4 lbs.




**Carton Wt.:** 118 lbs.

**Cube:** 36.6 ft.<sup>3</sup>

**Note:** MicroSik<sup>®</sup> equipment may extend beyond the outside perimeter of the bath. Consult factory for details.

**Construction:** Fiberglass reinforced acrylic bath with Level Form<sup>™</sup> full-support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

Standard		A 120V system that includes a MicroSilk <sup>®</sup> unit, an electronic control, and a 20-minute timer.
Premier		A 120V system that includes a MicroSilk <sup>®</sup> unit; (2) Chromatherapy mood lights; Automatic Ozone System; a digital control with LCD display, enhanced user control options, and a 20-minute timer. Control keypad controls the MicroSilk <sup>®</sup> unit, LED Chromatherapy mood lights, and shows equipment status, and time remaining.
Signature		A 120V system that includes a MicroSilk <sup>®</sup> unit; (2) Chromatherapy mood lights; Automatic Ozone System, a digital control with LCD display; low water level and temperature sensors; enhanced user control options, a 20-minute timer; and Bluetooth Sound Immersion System. Control keypad controls the MicroSilk <sup>®</sup> unit, LED Chromatherapy mood lights, and shows equipment status, water temperature, and time remaining.