

## DESCRIPTION

- Metal construction with various finishes identified by suffix

## OPERATION


- Temperature operates through an 270° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 90° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3^\circ$

## STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1
- **ADA**  for lever handles


## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

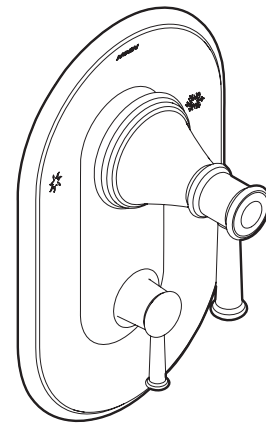

## BELFIELD™ POSI-TEMP® with Built-In 3 Function Transfer Valve Trim

**Models:** T2310 series  
**Fits Valves:** 2521  
 2551  
 2571  
 2581

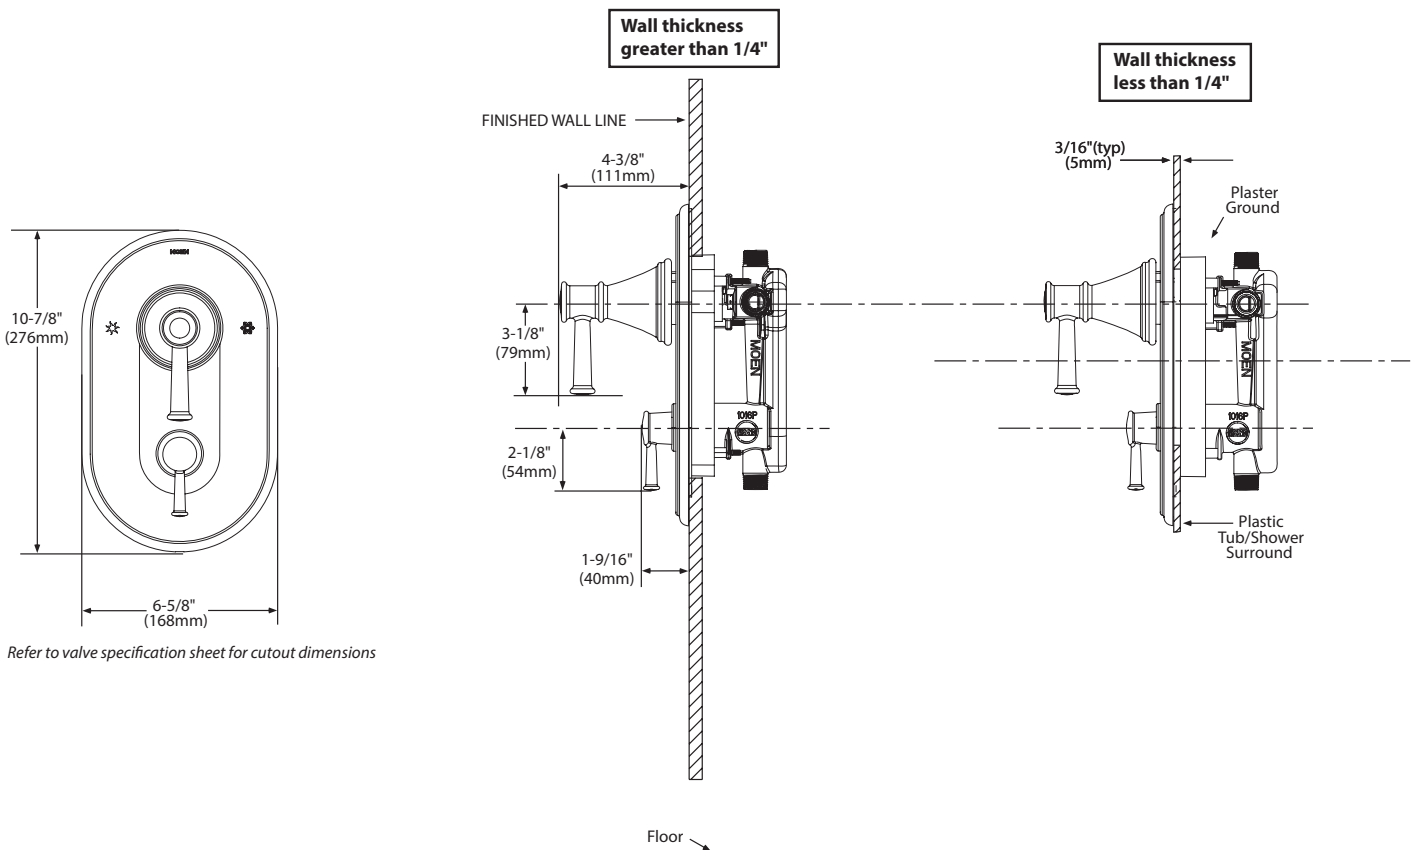

Refer to valve specification sheet for cutout dimensions

## CRITICAL DIMENSIONS

(DO NOT SCALE)