


178P24CH Theft-Proof Mirror




FEATURES/TYPICAL SPECIFICATIONS

- Surface Mount Installation
 - Pre-drilled mounting holes spacing: $y1 = 10.312''$, $y2 = 20.624''$ center-to-center and $x1 = 14.624''$, $x2 = 7.312''$ center-to-center
- 20 gauge galvanized steel mirror back
- Concealed tamper-proof keyhole and retainer clip mounting system
- 3/16" thick float glass mirror
- Polished stainless steel frame (SS8)
- Mirror can be mounted vertically or horizontally
- Includes installation hardware
- Pallet quantity = 28 units

Finishes:

Housing: N/A
 Mirror: Flat Mirror
 Frame: SS8-Polished Stainless Steel

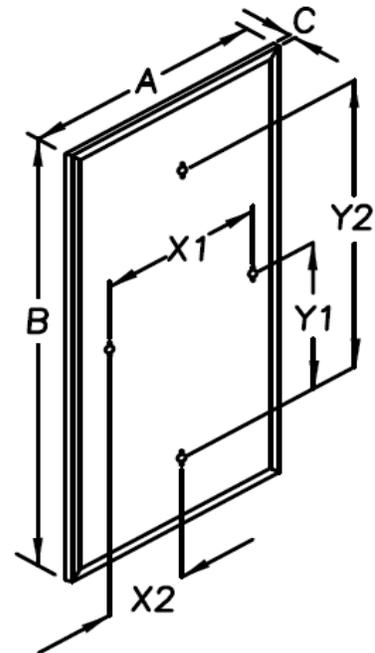

		Dimensions In Inches		
Model #	Description	A	B	C
178P24CH	THEFT PROOF 18X24 SS8	18 $\frac{1}{8}$	24 $\frac{1}{8}$	$\frac{1}{2}$

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date

* All models and material specifications are subject to change or withdrawal without notice.