


Topsider MEDICINE CABINET



FEATURES/TYPICAL SPECIFICATIONS


- Surface Mount Installation
 - Pre-drilled mounting holes spacing: $x = 11.625"$ center-to-center and $y = 9.0"$ center-to-center
- Formed and welded steel housing (WB/ST)
 - 24 gauge steel construction with white, heat cured, acrylic paint finish
- Framed mirror door
 - $3/32"$ thick float glass mirror door front
 - Polished stainless steel frame (SS8)
 - 30 gauge steel door back with white, heat cured, acrylic paint finish
- 16" piano hinge welded to the door and mechanically fastened to the cabinet body (HG01) (1 typical)
- Magnetic catch in cabinet body flange aligns to stainless steel striker plate on the door (1 typical)
- Reversible for left-hand or right-hand door swing
- 26 gauge galvanized steel shelves with white, heat cured, enamel paint finish (2 typical)
 - Fixed shelves — removable (FX2)
- Includes installation hardware
- Pallet Quantity = 42 units

Finishes:

Housing: PT01-Basic White

Mirror: Flat Mirror

Frame: SS8-Polished Stainless Steel

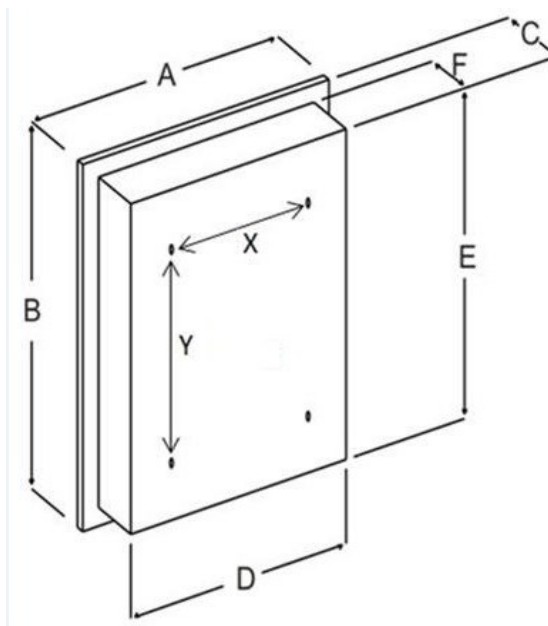

		Dimensions In Inches					
Model #	Description	A	B	C	D	E	F
26018CH	MEDCAB 1DR 14X18 SS8 WB/ST	14 $\frac{1}{8}$	18 $\frac{1}{8}$	5	13 $\frac{1}{2}$	17	4 $\frac{1}{2}$

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date