

SPECIFICATION SHEET

Styleline II Medicine Cabinet



FEATURES/TYPICAL SPECIFICATIONS


- Surface Mount Installation
 - · Pre-drilled mounting holes
- Formed and welded steel housing (WB/ST)
 - 24 gauge steel construction with white, heat cured, acrylic paint finish
- · Framed mirror door
 - 1/8" thick float glass mirror door front with polished vertical edges
 - Polished chrome frame on top and bottom of mirror door (CH8)
 - 24 gauge steel, pan formed door back with white, heat cured, acrylic paint finish
- Magnetic catch in cabinet body flange aligns to stainless steel striker plate on the door (1 typical)
- 16" piano hinge welded to the door and mechanically fastened to the cabinet body (HG01) (1 typical)
- · Right-hand door swing
- Built-in top light fixture with a chrome plated 24 gauge steel faceplate and polished chrome socket cups (typical 3). (Uses three incandescent 60 watt maximum, G style, 120V bulbs (I60G) - bulbs not included)
- 26 gauge galvanized steel shelves with white, heat cured, enamel paint finish, adjustable (ADJ) (3 typical)
- Includes installation hardware
- Pallet Quantity = 18 units

Finishes:

Housing: PT01—Basic White

Mirror: Flat Mirror with 2 Polished Edges

Frame: CH8—Polished Chrome

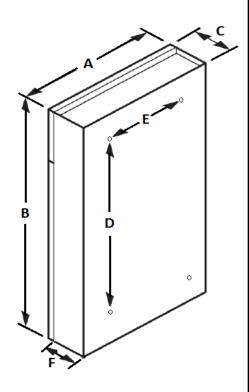

| | | Dimensions In Inches | | | | | |
|---------|----------------------------|----------------------|----|------|-----|----------|----|
| Model # | Description | Α | В | С | D | E | F |
| 565 | MEDCAB 1DR 18X28 CH8 WB/ST | 18 | 28 | 41/2 | 22% | 11-11/16 | 3½ |

The "C" dimension is cabinet only without socket cups and bulbs.

| REFERENCE | QTY. | REMARKS | Project | | |
|-----------|------|---------|--------------|------|--|
| | | | Location | | |
| | | | Architect | | |
| | | | Engineer | | |
| | | | Contractor | | |
| | | | Submitted by | Date | |

^{*} All models and material specifications are subject to change or withdrawal without notice.