

SPECIFICATION SHEET

Hampton Locking Medicine Cabinet



FEATURES/TYPICAL SPECIFICATIONS


- Recess Mount Installation
 - Wall Opening/Rough-in Dimensions:14" x 24" x 3-3/4"
- One piece drawn steel housing (HY/ST)
 - 26 gauge steel with white, heat cured, acrylic paint finish
- Framed mirror door
 - Extruded polystyrene frame with laminate, decorative foil in oil rubbed bronze finish
 - 3MM float glass mirror door front with clean cut edges
 - 26 gauge steel door back with white, heat cured, acrylic paint finish
- Round magnet with soft plastic white cover located in the door aligns to the cabinet body flange (1 typical)
- 16" piano hinge welded to the door and mechanically fastened to the cabinet body (HG01) (1 typical)
- Non-key retaining cylinder lock, includes 2 brass keys that are unique and numbered
- Reversible for left-hand or right-hand door swing
- 5/32" thick float glass shelves, adjustable (ADJ) (3 typical)
- Mounting hardware included
- Standard Pallet Quantity of 26 units

Finishes:

Housing: PT01 — Basic White

Mirror: Flat Mirror

Frame: ORB—Oil Rubbed Bronze

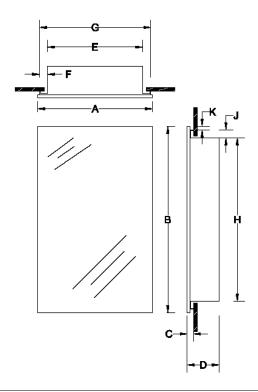

			Dimensions In Inches									
	Model #	Description	Α	В	С	D	E	F	G	Н	J	K
l	625N244BZCL	MEDCAB 1DR 15X25 ORB HY/ST	15-7/8	25-1/2	2	5-3/8	13-1/2	1	15-1/2	23-1/2	1	0

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date

^{*} All models and material specifications are subject to change or withdrawal without notice.

S625N244BZCL_C03