

# SHOWER MODULE DRAIN

## 827/828 SERIES

### SPECIFICATION

Sioux Chief 827/828 series shower module drain shall be used where necessary in drainage systems. Shower drain shall have an outer locknut design with no-caulk (compression gasket) connection for Sch. 40 ABS/PVC pipe. Snap-in strainer shall meet all applicable load and flow requirements for intended use. Designed in accordance with ASME A112.18.2-2005 / CSA B125.2-05.

### MATERIALS

strainer: 430 Stainless steel  
 body/locknut: PVC (828 Series) Brass (827 Series)  
 washers: rubber, polyethylene  
 compression gasket: elastomer

### STRAINER LOAD RATING

300 lbs. (19 gauge)

### STRAINER FREE AREA

3.25 in<sup>2</sup>

### STRAINER FLOW CAPACITY\*


7.02 GPM

### DIMENSIONS

A: connection 2" Sch. 40 no-caulk (compression gasket)  
 B: top diameter 4 1/4"  
 C: overall height 2"

\* Estimated/calculated flow rate through the strainer (not the entire drain) at 1/4" head.

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

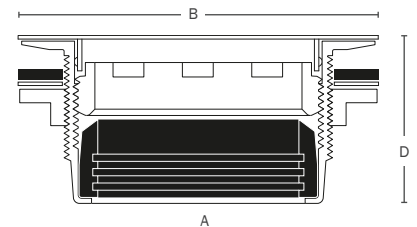

### Select Item Number

- 827-2B Brass body/locknut
- 828-2 PVC body/locknut