

One-Way Volume Control Valve

TS2A

FEATURES

- Corrosion resistant
- 1/2" NPT connection

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION

The one-way volume control valve shall have a NPT connection. One-way volume control valve shall be TOTO Model TS2A and required one-way volume control trim sold separately.




One-Way Volume Control Valve

SPECIFICATIONS

- Lifetime Limited Warranty Warranty ٠ (Residential Use)
- Material

One Year (Commercial Use)


- Bronze Shipping Weight
- 1.68 lbs. Shipping Dimensions 7-5/8"L x 5-1/8"W x 6-1/2"H

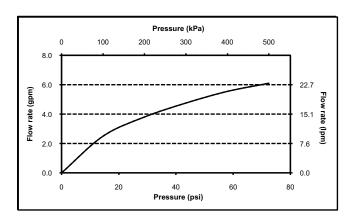

INSTALLATION NOTES

TRIM REQUIRED:

One-way volume control trim sold separately.

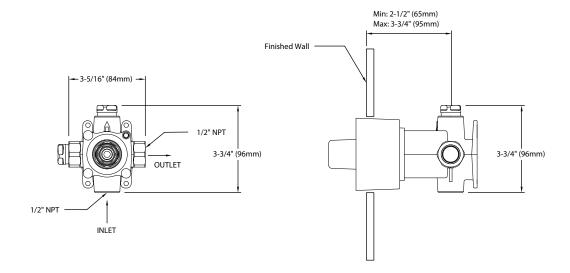

TOTO

These dimensions and specifications are subject to change without notice