Vivian® Single-Handle Lavatory Faucet

FEATURES

- WaterSense certified low-flow 1.2 gpm (4.5 lpm) faucet
- Lever handle
- Solid brass construction
- Ceramic disk valve cartridge
- Metal pop-up drain assembly included

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

OPTIONAL ACCESSORIES

- THP3158#CP 4" Cover Plate
- 71244T8CC 8" Cover Plate

CODES/STANDARDS

- Complies with federal and state lead-free legislation
- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9, NSF 372
- Certifications: IAPMO(cUPC), EPA WaterSense, California Energy Commission (CEC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, City of New York and others
- ADA compliant







PRODUCT SPECIFICATION

The single-handle lavatory faucet shall have a maximum flow rate of 1.2 gpm (4.5 lpm). Product shall have lever handle. Product shall have a solid brass construction. Product shall have a ceramic disk valve cartridge. Product shall include metal popup drain assembly. Product shall beTOTO Model TL220SD12#



Vivian® Single-Handle Lavatory Faucet

SPECIFICATIONS

Material

Warranty
Lifetime Limited Warranty

(Residential Use)


One Year (Commercial Use)


Brass


Maximum Flow Rate 1.2 gpm (4.5 lpm)


Shipping Dimensions 15"L x 7-7/8"W x 3"H

Shipping Weight 5.0 lbs.

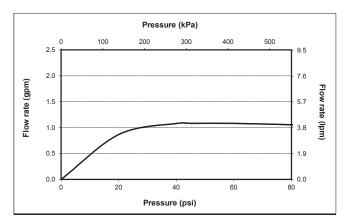





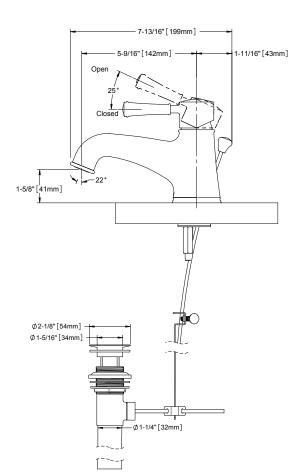



These dimensions and specifications are subject to change without notice