

#### **Features**

- $32^{63}$ /<sub>4</sub>" (838) x 221/<sub>64</sub>" (559) x 9" (229) top mount kitchen sink. Double (large/small) compartments.
- 18 gauge 304 stainless steel.
- Small sink on right.
- Rear center drain locations.
- Brushed finish.
- 15mm radius corners.
- 3mm sound deadening pads.
- Fits 36" base cabinet width.

### Components

Product includes: **Cutout Template** Installation Hardware Installation Instructions

#### **Options**

2210R Covered Sink Strainer 4010 Covered Disposer Strainer TMTK1 Magnetic Tool Set

#### Warranty

Lifetime Limited Warranty

### **Specified Model**

Model	CTDD33229
Overall Dimensions	L32 <sup>63</sup> %4" x W22 <sup>1</sup> %4" x D9" 838 x 559 x 229
Dimensions	636 X 559 X 229
Bowl Dimensions	L17¼" x W1855%4" x D9"
(Left)	438 x 479 x 229
Bowl Dimensions	L11%" x W16¼" x D8"
(Right)	290 x 414 x 203
Drain holes:	35/8" (92mm)
Shipping Weight	23 lbs.
Material	18 gauge 304 stainless steel
Installation	counter top mounted
Required	template, included

#### To Be Specified:

see back for configurations available for this sink


Faucet Hole Drillings
1 Hole
2 Holes


# Codes/Standards

ASME A112.19.3/CSA B45.4

## **Notes**

Install this product according to the installation instructions.

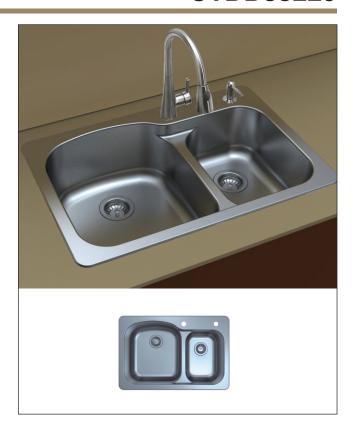




# 33" x 22" Offset 75/25 Double CTDD33229

# Faucet Hole Configurations available for this sink model




# **Optional Accessories**

# 2210R Covered Flip Top Sink Strainer.




Water drains easily when cover is in place. Cover flips up with easy touch. Polypropylene housing. Fits standard 3½" opening.

# 2310 Remote Covered Flip Top Sink Strainer.



Turn the remote knob to open and close drain. Water drains easily when cover is in place. Cover flips up with easy touch. Polypropylene housing. Fits standard 3½" opening. 1¾" hole required in countertop for remote installation. Remote cable 25½" L.

# 4010 Covered Flip Top Disposer Strainer.



Water drains easily when cover is in place. Cover flips up with easy touch. Polypropylene housing. Top mount installation for 3½" opening.