

LUCERNE™ WALL-HUNG LAVATORY MODIFICATIONS

VITREOUS CHINA

& BARRIER FREE

LUCERNE™ WALL-HUNG LAVATORY

- Wall-hung sink
- Vitreous china
- Front overflow
- · D-shaped bowl
- Self-draining deck area with contoured back and side splash shields
- Faucet ledge
- Compliant with Texas accessibility standard (TAS) for children age group 13 and up

Faucet holes on 203mm (8") centers (Illus.):

- □ 0356.037 For wall hanger (included) or concealed arms support
 - Extra right-hand hole
 - Long shank soap/lotion dispenser required (by others)

Faucet holes on 102mm (4") centers:

- 0355.056 For wall hanger (included) or concealed arms support
 - Extra left-hand hole
 - Long shank soap/lotion dispenser required (by others)
- 0355.034 For wall hanger (included) or concealed arms support
 - Extra right-hand hole
 - Long shank soap/lotion dispenser required (by others)
- 0355.041 For wall hung sink thru bolt support on backsplash for wall anchors

Single center faucet hole (Illus.):

- □ 0356.137 For wall hanger (included) or concealed arms support
 - Extra right-hand hole
 - Long shank soap/lotion dispenser required (by others)
- □ 0356.115 For wall hanger (included) or concealed arms support
 - Extra left-hand hole
 - Long shank soap/lotion dispenser required (by others)

Nominal Dimensions:

521 x 464mm (20-1/2" x 18-1/4")

Bowl sizes:

381mm (15") wide 254mm (10") front to back 165mm (6-1/2") deep

Compliance Certifications - Meets or Exceeds the Following Specifications:

 ASME A112.19.2 / CSA B45.1 for Vitreous China Fixtures



SEE FOLLOWING PAGES FOR ROUGHING-IN DIMENSIONS

┰	Re	C _n	~~	ifi,	~d.

- ☐ Color: ☐ White
- □ Faucet*:
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- Nipple:
- ☐ Bracket Support (by others):
- ☐ Concealed Arms Support (by others):



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDE-LINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of front rim mounted 864mm (34") from finished floor.

^{*} See faucet section for additional models available




LUCERNE™ WALL-HUNG LAVATORY

BARRIER FREE

0356.037 8" CTRS FOR WALL HANGER OR CONCEALED ARMS EXTRA RIGHT HAND HOLE

0355.056 4" CTRS FOR WALL HANGER OR CONCEALED ARMS EXTRA LEFT HAND HOLE

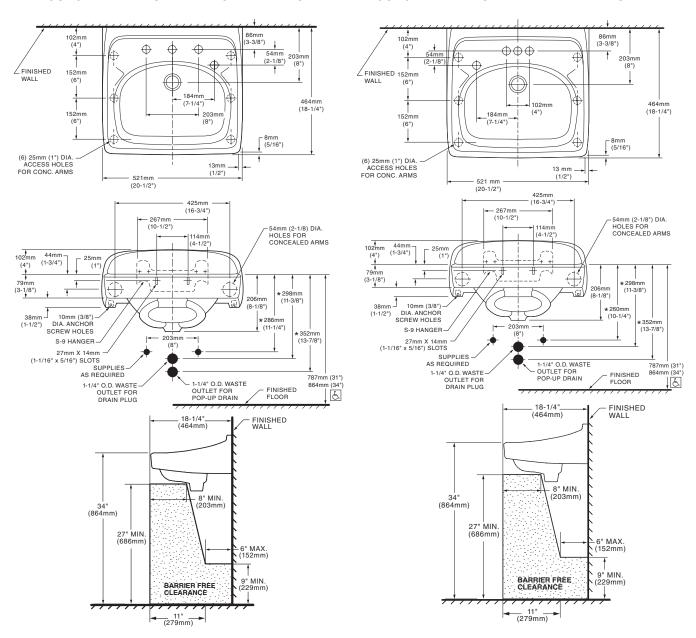

NOTES:

**PIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. CONCEALED ARM SUPPORT AS REQUIRED TO BE FURNISHED BY OTHERS.


IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

LAVATORY DESIGNED TO MEET ADA HANDICAPPED GUIDELINES WITH MOUNTING HEIGHT SET AT 864MM (34") ABOVE FINISHED FLOOR.



LUCERNE™ **WALL-HUNG LAVATORY**

0355.034 4" CTRS FOR WALL HANGER OR CONCEALED ARMS EXTRA RIGHT HAND HOLE 0355.041 WALL HUNG SINK THRU BOLT SUPPORT ON BACKSPLASH FOR WALL ANCHORS

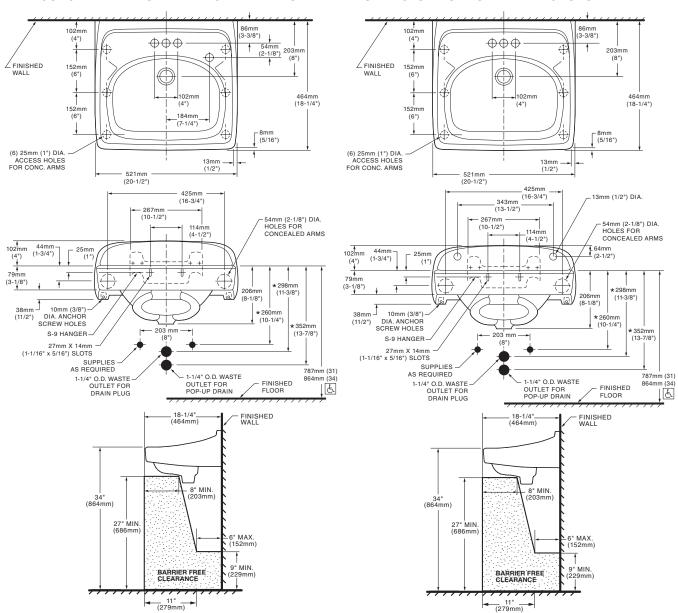

NOTES:

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. CONCEALED ARM SUPPORT AS REQUIRED TO BE FURNISHED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

LAVATORY DESIGNED TO MEET ADA HANDICAPPED GUIDELINES WITH MOUNTING HEIGHT SET AT 864MM (34") ABOVE FINISHED FLOOR.




LUCERNE™ WALL-HUNG LAVATORY

BARRIER FREE

0356.137 SINGLE CENTER HOLE FOR WALL HANGER OR CONCEALED ARMS WITH EXTRA RIGHT HAND HOLE

0356.115 SINGLE CENTER HOLE FOR WALL HANGER OR CONCEALED ARMS WITH EXTRA LEFT HAND HOLE

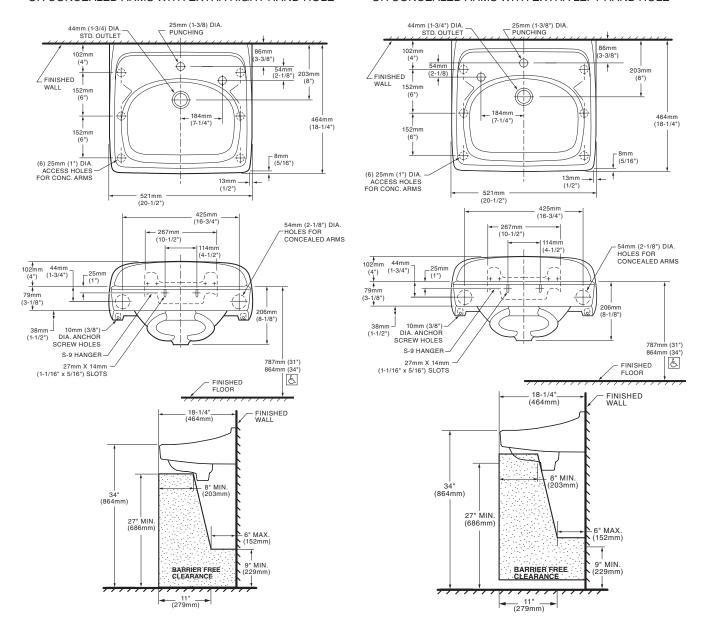

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. CONCEALED ARM SUPPORT AS REQUIRED TO BE FURNISHED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

LAVATORY DESIGNED TO MEET ADA HANDICAPPED GUIDELINES WITH MOUNTING HEIGHT SET AT 864MM (34") ABOVE FINISHED FLOOR.