

## Features:

#### GWS21117

Included Components:

| GWS21117 |
|----------|
| GSE21128 |
| GWS28175 |
|          |

- Vitreous China
- 10" Rough-in
- 2" flush valve
- Corrosion resistant flapper
- Extra-Large Dual fed siphon jets for high power bowl clearing
- 100% glazed, large trapway for clog-free waste removal
- Double nut, multi-point tank-to-bowl mounting system for tool-free installation
- Color matched tank lever
- Toilet seat is not included

# **Technical Information:**

| Configuration        | Two-piece, ErgoHeight™<br>ADA Elongated Toilet |
|----------------------|--|
| Water per Flush      | 1.28 gpf (4.8 Lpf)                             |
| Rough-In             | 10″  |
| Height               | 30 <sup>3</sup> /8″                            |
| Width                | 17 <sup>3</sup> /16″                           |
| Depth                | 27 <sup>1</sup> /16″                           |
| Тгарwау              | 1 <sup>3</sup> /4"                             |
| Large Water Surface  | 8 <sup>11</sup> /16" x 6 <sup>5</sup> /16"     |
| Shipping weight Bowl | 42.4 lbs                                       |
| Shipping weight Tank | 30.3 lbs                                       |

Accessories: (To be purchased separately)

N/A

Other Tank Options: (To be purchased separately) N/A


### **Available Colors:**

• White

Other: Refer to Price Book for additional colors/finishes

### Warranty:

• Limited Lifetime on Vitreous China, refer to the website for more details.

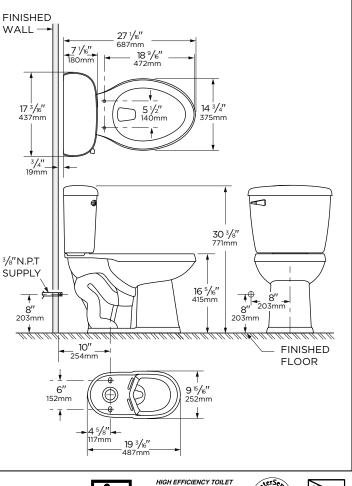



NOTES: All dimensions are in inches and milimeters. Illustrations may not be drawn to scale.

#### IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A 112.19.2 THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A HIGH EFFICIENCY WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.28 gpf (4.8 Lpf) OR LESS.